



Product Guide 2013

Passenger Car, SUV and Light Truck

MIDDLE EAST





Strong R&D Capabilities

Our higher purpose: To make world-class quality tyres.

We are constantly looking for new ways in every sense to make your journey delightful, to get you there from design to development.

Our mission is much more than the products we make. It is what defines us, unites us and inspires us to make a difference every day, in our company, our community and our world.



Table of Contents

PCR

Enduro 916+ - ULTRA HIGH PERFORMANCE	2
Enduro 716 - PREMIUM MILEAGE	4
Enduro 816 - POWERLINE COMFORT	6
Enduro 726 - COMFORT	8

SUV / LT

Enduro HT2 - PREMIUM HIGHWAY TERRAIN	10
Enduro A/T - ALL TERRAIN	12
Enduro M/T - OFF ROAD MAXIMUM TRACTION	14
Enduro 616 - COMMERCIAL VAN	16
Enduro LT - COMMERCIAL VAN	28
Designations, Load Index and Speed Rating	20
Size Chart	21



ULTRA HIGH PERFORMANCE

ENDURO 916+



Performance



Handling



Directional



All Season



Features	Benefits
New enhanced V-shape tread pattern with multiple lateral tread grooves	▶ High speed stability in both dry and wet conditions
Optimized variable pitch pattern design	▶ Outstanding handling combined with smooth and quiet ride
Solid center area	▶ Steering precision with enhanced driving performance
Full width jointless nylon cap ply	▶ Improves uniformity and tread block stability for better performance
Equal Force Carcass construction	▶ Provides ride comfort and excellent steering response



Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG	 Tread Depth	 Overall Diameter	Side Wall
						mm	mm	
20	35	245/35ZR20	95	W	280AAA	8.3	680	BSW
	35	255/35ZR20	97	W	280AAA	8.4	686	BSW
19	30	265/30ZR19	93	W	280AAA	8.2	643	BSW
	30	275/30ZR19	96	W	280AAA	8.4	649	BSW
	35	235/35ZR19	91	W	280AAA	8.2	647	BSW
	35	245/35ZR19	93	W	280AAA	8.3	655	BSW
18	35	215/35ZR18	84	W	280AAA	8.1	607	BSW
	35	255/35ZR18	94	W	280AAA	8.4	635	BSW
	35	265/35ZR18	97	W	280AAA	8.4	643	BSW
	40	225/40ZR18	92	W	280AAA	8.1	637	BSW
	40	235/40ZR18	95	W	280AAA	8.2	645	BSW
	40	245/40ZR18	97	W	280AAA	8.3	653	BSW
	45	245/45ZR18	100	W	280AAA	8.3	677	BSW
	45	255/45ZR18	103	W	280AAA	8.4	687	BSW
17	40	205/40ZR17	84	W	280AAA	8	596	BSW
	40	215/40ZR17	87	W	280AAA	8.1	604	BSW
	40	245/40ZR17	91	W	280AAA	8.3	628	BSW
	45	215/45ZR17	91	W	280AAA	8.1	626	BSW
	45	225/45ZR17	94	W	280AAA	8.3	634	BSW
	45	235/45ZR17	97	W	280AAA	8.5	644	BSW
	45	245/45ZR17	99	W	280AAA	8.3	652	BSW
16	40	215/40ZR16	86	W	280AAA	8.1	578	BSW
	50	195/50R16	88	V	280AAA	7.9	602	BSW
	50	205/50ZR16	87	W	280AAA	8	612	BSW
	55	205/55ZR16	94	W	280AAA	8	632	BSW
	55	225/55ZR16	99	W	280AAA	8.1	654	BSW
15	45	195/45ZR15	78	W	280AAA	7.8	557	BSW
	50	205/50ZR15	89	W	280AAA	8	587	BSW
	55	195/55R15	85	V	280AAA	7.9	595	BSW
	55	205/55ZR15	88	W	280AAA	8	607	BSW

BSW Black Side Wall UTQG Uniform Tyre Quality Grade



PREMIUM MILEAGE

ENDURO 716



Comfort



Mileage



Fuel efficient



All Season



Features	Benefits
Special tread compound	▶ Provides mileage and excellent grip
Circumferential center rib	▶ Provides better handling and control
Full nylon jointless cap ply	▶ Improves uniformity and tyre stability
Equal Force Carcass with dimensionally stable polyester cords	▶ Provide ride comfort and excellent steering response
High-tension bead	▶ Provides excellent load bearing, steering and cornering



Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG	 Tread Depth	 Overall Diameter	Side Wall
						mm	mm	
17	65	215/65R17	99	T	620AB	9.3	712	BSW
16	60	205/60R16	92	H	620AA	9.2	652	BSW
	60	215/60R16	95	H	620AA	9.3	664	BSW
	60	225/60R16	98	H	620AA	9.4	676	BSW
15	60	195/60R15	88	H	620AA	9.1	615	BSW
	60	205/60R15	91	H	620AA	9.2	627	BSW
	65	195/65R15	91	H	620AA	9.1	635	BSW
	65	205/65R15	95	H	620AA	9.2	647	BSW
	70	205/70R15	96	H	620AA	8.8	669	BSW
	70	215/70R15	98	H	620AA	8.9	683	BSW
14	60	185/60R14	82	T	620AB	9	578	BSW
	60	195/60R14	86	T	620AB	9.1	590	BSW
	65	175/65R14	82	T	620AB	8.9	584	BSW
	65	185/65R14	86	T	620AB	9	596	BSW
	70	165/70R14	81	T	620AB	9	588	BSW
	70	185/70R14	88	T	620AB	9.2	616	BSW
	70	195/70R14	91	T	620AB	9.1	630	BSW
13	70	165/70R13	79	T	620AB	9	562	BSW
	70	185/70R13	86	T	620AB	9.2	590	BSW

BSW Black Side Wall **UTQG** Uniform Tyre Quality Grade

POWERLINE COMFORT

NEW

ENDURO 816



Comfort



Mileage



Fuel efficient

Features	Benefits
Four wide circumferential grooves	▶ Provide efficient water evacuation and outstanding wet performance
Silica compound	▶ Reduces rolling resistance while providing exceptional grip in wet and dry road conditions
Full nylon jointless cap ply	▶ Improves uniformity and tyre stability
Equal Force Carcass construction	▶ Provides ride comfort and excellent steering response
Extended shoulder grooves	▶ Excellent cornering stability





Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG	 Tread Depth	 Overall Diameter	Side Wall
						mm	mm	
18	60	P225/60R18	99	H	380AA	8.1	727	BSW
	60	P235/60R18	102	H	380AA	8.1	739	BSW
	65	P235/65R18	104	T	380AA	8.2	763	BSW
17	60	P215/60R17	95	T	380AA	8.1	690	BSW
	60	P225/60R17	98	T	380AA	8.1	702	BSW
	60	235/60R17	102	T	380AA	8.2	714	BSW
	65	P215/65R17	98	T	380AA	8.1	712	BSW
	65	225/65R17	102	H	380AA	8.1	724	BSW
	65	P235/65R17	103	T	380AA	8.2	738	BSW
	65	P235/65R17	103	T	380AA	8.2	738	BSW
16	50	225/50R16	92	V	320AA	8.1	632	BSW
	55	205/55R16	91	V	320AA	8	632	BSW
	55	215/55R16	93	V	320AA	8.1	642	BSW
	60	205/60R16	92	H	380AA	8	652	BSW
	60	215/60R16	95	V	320AA	8.1	664	BSW
	60	225/60R16	98	H	380AA	8.1	676	BSW
	60	235/60R16	100	H	380AA	8.2	688	BSW
	65	215/65R16	98	T	380AA	8.1	686	BSW
	65	225/65R16	100	H	380AA	8.1	698	BSW
	65	235/65R16	103	T	380AA	8.2	712	BSW
	65	235/65R16	103	T	380AA	8.2	712	BSW
15	50	195/50R15	82	V	320AA	7.9	577	BSW
	50	205/50R15	86	V	320AA	8	587	BSW
	55	185/55R15	82	V	320AA	7.8	585	BSW
	55	195/55R15	85	V	320AA	7.9	595	BSW
	55	205/55R15	88	V	320AA	8	607	BSW
	60	185/60R15	84	H	380AA	7.8	603	BSW
	60	185/60R15	88	H	380AA	7.8	603	BSW
	60	195/60R15	88	V	320AA	7.9	615	BSW
	60	205/60R15	91	V	320AA	8	627	BSW
	60	215/60R15	94	H	380AA	8.1	639	BSW
	65	175/65R15	84	H	380AA	7.8	609	BSW
	65	185/65R15	88	H	380AA	7.9	621	BSW
	65	195/65R15	91	V	320AA	8	635	BSW
	65	205/65R15	94	V	320AA	8	647	BSW
	65	215/65R15	96	H	380AA	8.2	661	BSW
	65	215/65R15	96	H	380AA	8.2	661	BSW
	65	215/65R15	96	H	380AA	8.2	661	BSW
14	55	185/55R14	80	H	380AA	7.8	560	BSW
	60	185/60R14	82	T	380AA	7.8	578	BSW
	60	195/60R14	86	H	380AA	7.9	590	BSW
	65	155/65R14	75	T	380AA	7.7	558	BSW
	65	165/65R14	79	T	380AA	7.7	570	BSW
	65	175/65R14	82	T	380AA	7.8	584	BSW
	65	185/65R14	86	H	380AA	7.9	596	BSW
	65	195/65R14	89	T	380AA	7.8	610	BSW
	65	195/65R14	89	T	380AA	7.8	610	BSW
13	65	155/65R13	73	H	380AA	7.7	532	BSW
	65	165/65R13	77	T	380AA	7.7	544	BSW

BSW Black Side Wall UTQG Uniform Tyre Quality Grade

COMFORT

NEW

ENDURO 726



Comfort



Mileage



Fuel efficient

Features	Benefits
Advanced tread design	► Quiet and comfortable ride
Four wide circumferential grooves	► Provides efficient water evacuation and outstanding wet performance
Equal Force Carcass construction	► Provides ride comfort and excellent steering response
Soft rubber bead apex	► Enhance ride comfort
Extended shoulder grooves	► Excellent cornering stability





Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG			Side Wall
						Tread Depth mm	Overall Diameter mm	
15	70	205/70R15	96	H	460AA	7.9	669	BSW
	70	215/70R15	98	H	460AA	8	683	BSW
	70	225/70R15	100	H	460AA	8.1	697	BSW
	75	P205/75R15	97	S	460AA	7.9	689	BSW
	75	P215/75R15	100	S	460AA	8	703	BSW
	75	P225/75R15	102	S	460AA	8.1	719	BSW
	75	P235/75R15	105	S	460AA	8.1	733	BSW
14	70	165/70R14	85	T	460AA	7.5	588	BSW
	70	175/70R14	88	T	460AA	7.6	602	BSW
	70	185/70R14	88	H	460AA	7.7	616	BSW
	70	195/70R14	91	T	460AA	7.8	630	BSW
	70	205/70R14	98	T	460AA	7.9	644	BSW
	75	P185/75R14	89	S	460AA	7.7	634	BSW
	75	P195/75R14	92	S	460AA	7.8	648	BSW
	75	P205/75R14	95	S	460AA	7.9	664	BSW
	80	175/80R14	88	H	460AA	7.7	636	BSW
	80	175/80R14	88	T	460AA	7.7	636	BSW
13	70	145/70R13	71	T	460AA	7.3	534	BSW
	70	155/70R13	75	T	460AA	7.4	548	BSW
	70	165/70R13	79	T	460AA	7.5	562	BSW
	70	175/70R13	82	T	460AA	7.6	576	BSW
	70	185/70R13	86	T	460AA	7.7	590	BSW
	80	135/80R13	70	T	460AA	7.3	546	BSW
	80	145/80R13	75	T	460AA	7.6	562	BSW
	80	155/80R13	79	T	460AA	7.5	578	BSW
	80	165/80R13	83	T	460AA	7.6	594	BSW

BSW Black Side Wall UTQG Uniform Tyre Quality Grade

PREMIUM HIGHWAY TERRAIN

NEW

ENDURO HT2



Highway Terrain



Symmetrical



All Season

Features

Benefits

Superior tread pattern design	▶ Excellent handling and ride comfort
New tread compound	▶ Outstanding grip and stability
Optimized carcass tension technology	▶ Excellent balance of dry and wet handling
Advanced noise cancelling technology in tread block design	▶ Effectively reduces road noise





Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG			Side Wall
						mm	mm	
20	60	P275/60R20	114	S	520AB	8.2	838	OWL
18	60	P245/60R18	104	T	520AB	8.2	751	BSW
	60	P265/60R18	109	T	520AB	8.2	775	OWL
	65	P235/65R18	104	T	520AB	8.2	763	OWL
	70	P255/70R18	112	T	520AB	8.2	815	BSW
	70	P255/70R18	112	T	520AB	8.2	815	BSW
17	60	P275/60R17	110	T	520AB	8.2	762	OWL
	65	P235/65R17	103	T	520AB	8.2	738	BSW
	65	P245/65R17	105	T	520AB	8.2	750	BSW
	65	P255/65R17	108	S	520AB	8.2	764	BSW
	65	P265/65R17	110	T	520AB	8.2	776	OWL
	70	P235/70R17	108	S	520AB	8.2	762	OWL
	70	P245/70R17	108	T	520AB	8.2	776	OWL
	70	LT245/70R17	119/116	R	-	10.2	776	BSW
	70	P265/70R17	113	T	520AB	8.2	804	OWL
	70	LT265/70R17	121/118	R	-	10.2	804	OWL
16	65	P255/65R16	106	S	520AB	8.2	738	BSW
	70	P215/70R16	99	T	520AB	8.2	708	BSW
	70	P225/70R16	101	T	520AB	8.2	722	OWL
	70	P235/70R16	104	T	520AB	8.2	736	OWL
	70	P245/70R16	106	T	520AB	8.2	750	OWL
	70	P255/70R16	109	T	520AB	8.2	764	OWL
	70	P265/70R16	111	T	520AB	8.2	778	OWL
	75	LT225/75R16	115/112	R	-	10.2	744	BSW
	75	P235/75R16	106	T	520AB	8.2	758	BSW
	75	P245/75R16	109	T	520AB	8.2	774	OWL
	75	LT245/75R16	120/116	R	-	10.2	774	OWL
	75	P265/75R16	114	T	520AB	8.2	804	OWL
	75	LT265/75R16	123/120	R	-	10.2	804	OWL
	85	LT235/85R16	120/116	R	-	10.2	806	BSW
15	-	30x9.50R15LT	104	R	-	10.2	750	OWL
	-	31x10.50R15LT	109	R	-	10.2	775	OWL
	70	P215/70R15	97	S	520AB	8.2	683	BSW
	75	P235/75R15	105	T	520AB	8.2	733	OWL
	75	LT235/75R15	104/101	R	-	10.2	733	OWL

OWL Outlined White Letter BSW Black Side Wall UTQG Uniform Tyre Quality Grade



ALL TERRAIN

ENDURO A/T



All Terrain



Symmetrical



All Season

Features	Benefits
Special block tread design with multiple sipes	▶ Optimum on and off road traction
Open shoulder grooves and wide lugs	▶ Superior all surface traction for all weather conditions
Full nylon cap ply	▶ Improves stability and handling
High-tension bead	▶ Excellent load bearing support, steering and cornering





Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG	 Tread Depth	 Overall Diameter	Side Wall
						mm	mm	
18	65	P275/65R18	114	T	400AB	10.2	815	OWL
17	70	LT245/70R17	119/116	S	-	11.7	776	BSW
	70	P255/70R17	110	S	400AB	10.2	790	OWL
	70	LT265/70R17	121/118	S	-	11.9	804	OWL
	75	LT245/75R17	121/118	S	-	13.1	806	OWL
	75	LT245/75R16	115/112	S	-	13.1	744	BSW
16	75	LT245/75R16	120/116	S	-	13.1	774	BSW
	75	LT265/75R16	112/109	S	-	13.1	804	OWL
	75	LT285/75R16	122/119	S	-	13.3	834	BSW
	85	LT215/85R16	110/107	S	-	12.9	778	OWL
	85	LT235/85R16	120/116	S	-	13.1	806	BSW
	-	30x9.50R15LT	104	S	-	12.2	750	OWL
	-	31x10.50R15LT	109	S	-	12.6	775	OWL
15	75	LT235/75R15	104/101	S	-	12.1	739	OWL

OWL Outlined White Letter BSW Black Side Wall UTQG Uniform Tyre Quality Grade



**OFF ROAD
MAXIMUM
TRACTION**

ENDURO M/T



Mud Terrain



Symmetrical



All Season



Features

Aggressive pattern design

High void ratio and pyramidal shaped tread elements

Special casing profile and solid shoulder pattern

Reinforced casing construction

High-tension bead

Benefits

▶ Outstanding traction in all conditions

▶ Excellent hydroplaning resistance and self cleaning performance

▶ Enhanced traction and cornering

▶ Superior overall resistance to damage

▶ Excellent load bearing support, steering and cornering



Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG	 Tread Depth	 Overall Diameter	Side Wall
						mm	mm	
16	70	LT305/70R16	118/115	Q	-	14.6	840	OWL
	75	LT245/75R16	120/116	Q	-	14.6	780	OWL
	75	LT265/75R16	123/120	Q	-	14.6	810	OWL
	75	LT285/75R16	122/119	Q	-	14.6	840	OWL
	85	LT235/85R16	120/116	Q	-	14.6	812	OWL
15	-	31x10.50R15LT	109	Q	-	14.6	781	OWL
	-	33x12.50R15LT	108	Q	-	14.6	832	OWL
	75	LT235/75R15	104/101	S	-	14.6	739	OWL

OWL Outlined White Letter UTQG Uniform Tyre Quality Grade

COMMERCIAL VAN

NEW

ENDURO 616



Comfort



Mileage



Fuel efficient

Features	Benefits
Optimized weight construction	▶ Reduces fuel consumption and provides high comfort
Vertical grooves and open horizontal grooves arrangement	▶ Provide excellent wet and dry grip
Reinforced belt construction with two steel belts and full nylon protector	▶ Provide high load and speed capacity and good safety margins
New bead design	▶ Reduces heat build up in high load conditions and extends the life of the tyre





Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG			PLY RATING	MAX. LOAD (KG)	Side Wall
						Tread Depth mm	Overall Diameter mm			
16	60	195/60R16C LT	99/97	H	-	12	640	6PR	775/730	BSW
	65	195/65R16C LT	104/102	T	-	12	660	8PR	900/850	BSW
	65	205/65R16C LT	107/105	T	-	12	672	8PR	975/925	BSW
	65	215/65R16C LT	109/107	R	-	12	686	8PR	1030/975	BSW
	65	225/65R16C LT	112/110	T	-	13	698	8PR	1120/1060	BSW
	65	235/65R16C LT	115/113	R	-	14	712	8PR	1215/1150	BSW
	75	175/75R16C LT	101/99	R	-	12	668	8PR	825/775	BSW
	75	185/75R16C LT	104/102	R	-	12	684	8PR	900/850	BSW
	75	195/75R16C LT	107/105	R	-	12	698	8PR	975/925	BSW
	75	205/75R16C LT	110/108	R	-	13	714	8PR	1060/1000	BSW
	75	215/75R16C LT	116/114	R	-	13	728	10PR	1250/1180	BSW
15	65	205/65R15C LT	102/100	T	-	12	647	6PR	850/800	BSW
	70	195/70R15C LT	104/102	R	-	12	655	8PR	900/850	BSW
	70	205/70R15C LT	106/104	R	-	12	669	8PR	950/900	BSW
	70	215/70R15C LT	109/107	S	-	13	683	8PR	1030/975	BSW
	70	225/70R15C LT	112/110	R	-	13	697	8PR	1120/1060	BSW
14	-	185R14C LT	102/100	R	-	12	650	8PR	850/800	BSW
	-	195R14C LT	106/104	R	-	12	666	8PR	950/900	BSW
	65	175/65R14C LT	90/88	T	-	12	584	6PR	600/560	BSW
	70	165/70R14C LT	89/87	R	-	11	588	6PR	580/545	BSW
	75	215/75R14C LT	112/110	R	-	13	678	8PR	1120/1060	BSW

BSW Black Side Wall UTQG Uniform Tyre Quality Grade



COMMERCIAL VAN

Performs in all working environments

ENDURO **LT**



Commercial Van



Symmetrical



All Season

Features	Benefits
Reinforced construction comprising of two steel belts and full nylon protector	▶ Delivers robust load bearing capacity
Vertical grooves and open horizontal groove arrangement	▶ Provides excellent wet and dry grip
Specially designed tread compound	▶ Delivers maximum mileage performance with reduced heat
High-tension bead	▶ Excellent load bearing support, steering and cornering




Size Range

Specifications may change without notice

Inch	Series	Tyre Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	PLY RATING	MAX. LOAD (KG)	Side Wall
						mm	mm			
15	-	195R15C LT	106/104	N	-	13	693	8PR	950/905	BSW
14	-	185R14C LT	102/100	N	-	11	652	8PR	850/800	BSW
	-	195R14C LT	106/104	N	-	11	668	8PR	950/900	BSW
13	-	155R13C LT	85/83	N	-	10	578	6PR	515/487	BSW
	-	175R13C LT	97/95	N	-	11	610	8PR	730/690	BSW
12	-	155R12C LT	83/81	N	-	10	553	6PR	487/462	BSW

BSW Black Side Wall UTQG Uniform Tyre Quality Grade

Designations, Load Index and Speed Rating

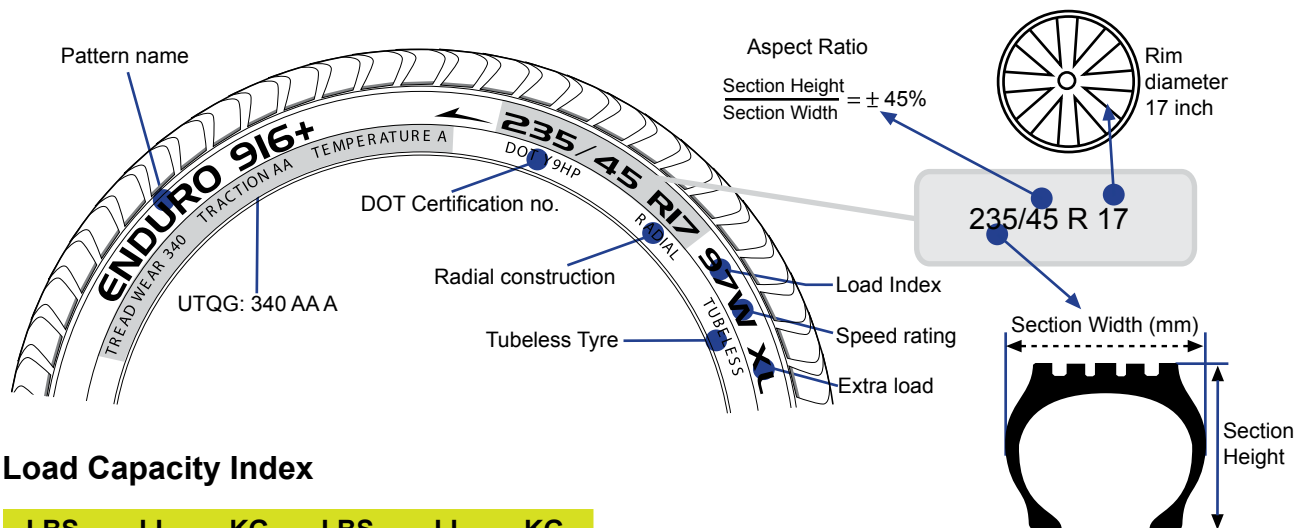

Load Capacity Index

LBS	LI	KG	LBS	LI	KG
677	67	307	1819	101	825
694	68	315	1874	102	850
716	69	325	1929	103	875
739	70	335	1984	104	900
761	71	345	2039	105	925
783	72	355	2094	106	950
805	73	365	2150	107	975
827	74	375	2205	108	1000
852	75	387	2271	109	1030
882	76	400	2337	110	1060
908	77	412	2403	111	1090
937	78	425	2469	112	1120
964	79	437	2535	113	1150
992	80	450	2601	114	1180
1018	81	462	2679	115	1215
1047	82	475	2756	116	1250
1073	83	487	2833	117	1285
1102	84	500	2910	118	1320
1135	85	515	2998	119	1360
1168	86	530	3086	120	1400
1201	87	545	3197	121	1450
1235	88	560	3307	122	1500
1279	89	580	3417	123	1550
1323	90	600	3527	124	1600
1356	91	615	3658	125	1650
1389	92	630	3748	126	1700
1433	93	650	3858	127	1750
1477	94	670	3968	128	1800
1521	95	690	4079	129	1850
1565	96	710	4189	130	1900
1609	97	730	4299	131	1950
1653	98	750	4409	132	2000
1764	99	775	4542	133	2060
1819	100	800	4674	134	2120

Speed Rating Symbol

MPH	SR	KM/H
31	B	50
37	C	60
40	D	65
43	E	70
50	F	80
56	G	90
62	J	100
68	K	110
75	L	120
81	M	130
87	N	140
93	P	150
100	Q	160
106	R	170
113	S	180
118	T	190
124	U	200
130	H	210
149	V	240
168	W	270
186	Y	300
Above 186	(Y)	Above 300

Load Range Chart

Load Range	Ply Rating
A	2
B	4
C	6
D	8
E	10
F	12
G	14
H	16
J	18
L	20
M	22
N	24

TYRE SIZE

PCR



14/15/16/17/18/19/20 Rim



30/35/40/45/50/55/60 Series

Series	Dimension	ENDURO 726	ENDURO 816	ENDURO 716	ENDURO 916+
30	265/30ZR19				93W
30	275/30ZR19				96W
35	215/35ZR18				84W
35	235/35ZR19				91W
35	245/35ZR19				93W
35	245/35ZR20				95W
35	255/35ZR18				94W
35	255/35ZR20				97W
35	265/35ZR18				97W
40	205/40R17				84H
40	205/40ZR17				84W
40	215/40ZR16				86W
40	215/40R17				87H
40	215/40ZR17				87W
40	225/40ZR18				92W
40	235/40ZR18				95W
40	245/40ZR17				91W
40	245/40ZR18				97W
45	195/45ZR15				78W
45	215/45ZR17				91W
45	225/45R17				94H
45	225/45ZR17				94W
45	235/45ZR17				97W
45	245/45ZR17				99W
45	245/45ZR18				100W
45	255/45ZR18				103W
50	195/50R15		82V		
50	195/50R16				88V
50	205/50R15		86V		89H
50	205/50ZR15				89W
50	205/50R16				87H

Series	Dimension	ENDURO 726	ENDURO 816	ENDURO 716	ENDURO 916+
50	205/50ZR16				87W
50	225/50R16		92V		
55	185/55R14		80H		
55	185/55R15		82V		
55	195/55R15		85V		85V
55	205/55R15		88V		88H
55	205/55ZR15				88W
55	205/55R16		91V		94H
55	205/55ZR16				94W
55	215/55R16		93V		
55	225/55ZR16				99W
60	185/60R14		82T	82T	
60	185/60R15		88H		
60	P185/60R15		84T		
60	195/60R14		86H	86T	
60	195/60R15		88H	88T	
60	195/60R15		88H	88T	
60	P195/60R15		87T		
60	205/60R15		91H	91T	
60	205/60R15		91H	91T	
60	205/60R16		92H	92T	
60	P205/60R16		91V		
60	215/60R15		94H		
60	215/60R16		95H	95T	
60	P215/60R16		94T		
60	P215/60R17		95T		
60	225/60R16		98H	98T	
60	P225/60R16		97T		
60	P225/60R17		98T		
60	P225/60R18		99H		
60	235/60R16		100H		

TYRE SIZE

PCR



14/15/16/17/18/19/20 Rim



30/35/40/45/50/55/60 Series

Series	Dimension	ENDURO 726	ENDURO 816	ENDURO 716	ENDURO 916+
60	P235/60R16		99T		
60	235/60R17		102T		
60	P235/60R18		102H		
65	155/65R13		73H		
65	155/65R14		75T		
65	165/65R13		77T		
65	165/65R14		79T		
65	175/65R14		82T	82T	
65	175/65R15		84H		
65	185/65R14		86H	86T	
65	P185/65R14		85T		
65	185/65R15		88H		
65	195/65R14		89H		
65	195/65R15		91H	91T	
65	P195/65R15		89T		
65	205/65R15		94H	95T	
65	P205/65R15		92T		
65	215/65R15		96H		
65	P215/65R15		95T		
65	215/65R16		98T		
65	215/65R17			99T	
65	P215/65R17		98T		
65	225/65R16		100H		
65	225/65R17		102H		
65	235/65R16		103T		
65	P235/65R17		103T		
65	P235/65R18		104T		
70	145/70R13	71T			
70	145/70R13*	71T			
70	155/70R13	75T			
70	165/70R13	79T		79T	
70	165/70R14	85T		81T	

Series	Dimension	ENDURO 726	ENDURO 816	ENDURO 716	ENDURO 916+
70	175/70R13	82T			
70	175/70R14	88T			
70	185/70R13	86T		86T	
70	185/70R14	88H		88T	
70	195/70R14	91T		91T	
70	205/70R14	98T			
70	205/70R15	96H		96T	
70	205/70R15	96H		96T	
70	P205/70R15	95T			
70	215/70R15	98H		98T	
70	P215/70R15	97T			
70	225/70R15	100H			
70	P225/70R15	100T			
70	P235/70R15*	102T			
75	P185/75R14	89S			
75	P195/75R14	92S			
75	P205/75R14	95S			
75	P205/75R15	97S			
75	P215/75R15	100S			
75	P225/75R15	102S			
75	P235/75R15	105S			
80	135/80R13	70T			
80	145/80R12				
80	145/80R13	75T			
80	155/80R12				
80	155/80R13	79T			
80	165/80R13	83T			
80	175/80R14	88H			
80	185/80R14				

TYRE SIZE

SUV / LT



12/13/14/15/16/17/18 Rim



60/65/70/75/85 Series

Series	Dimension	ENDURO A/T	ENDURO HT2	ENDURO M/T	ENDURO 616	ENDURO LT
	6.50R16 LT					
	6.50R16 LT					
	30x9.50R15LT	104S	104R			
	31x10.50R15LT	109S	109R	109Q		
	31x10.50R15LT	109S	109R	109Q		
	33x12.50R15LT			108Q		
	145R12C LT					80/78Q
	155R12C LT					83/81N
	155R13C LT					85/83N
	175R13C LT					97/95N
	185R14C LT				102/100Q	102/100N
	195R14C LT*				106/104Q	106/104N
	195R15C LT					106/104N
60	195/60R16C LT				99/97H	
60	P245/60R18		104T			
60	P265/60R18		109T			
60	P275/60R17		110T			
60	P275/60R20		114S			
65	175/65R14C LT				90/88T	
65	195/65R16C LT				104/102T	
65	205/65R15C LT				102/100T	
65	205/65R16C LT				107/105T	
65	215/65R16C LT				109/107R	
65	225/65R16C LT				112/110T	
65	235/65R16C LT				115/113R	
65	P235/65R17		103T			
65	P235/65R18		104T			
65	P245/65R17		105T			
65	P255/65R16		106S			
65	P255/65R17		108S			
65	P265/65R17		110T			
65	P275/65R18	114T				
70	165/70R14C LT				89/87R	
70	195/70R15C LT				104/102R	
70	205/70R15C LT				106/104R	
70	215/70R15C LT				109/107S	
70	P215/70R15		97S			
70	P215/70R16		99T			
70	225/70R15C LT				112/110R	
70	LT225/70R16	102/99S				

TYRE SIZE

SUV / LT

 12/13/14/15/16/17/18 Rim

 60/65/70/75/85 Series

Series	Dimension	ENDURO AT	ENDURO HT2	ENDURO M/T	ENDURO 616	ENDURO LT
70	P225/70R16		101T			
70	P235/70R16		104T			
70	P235/70R17		108S			
70	P245/70R16		106T			
70	LT245/70R17	119/116S	119/116R			
70	P245/70R17		108T			
70	P255/70R16		109T			
70	P255/70R17	110S				
70	P255/70R18		112T			
70	P265/70R16		111T			
70	LT265/70R17	121/118S	121/118R			
70	P265/70R17		113T			
70	P275/70R16	114T				
70	LT305/70R16			118/115Q		
75	175/75R16C LT				101/99R	
75	185/75R16C LT				104/102R	
75	195/75R16C LT				107/105R	
75	205/75R14C LT*					109/107S
75	205/75R16C LT				110/108R	
75	215/75R14C LT				112/110R	
75	215/75R16C LT				116/114R	
75	225/75R16C LT				118/116R	
75	LT225/75R16	115/112S	115/112R			
75	LT235/75R15	104/101S	104/101R	104/101S		
75	P235/75R15		105T			
75	P235/75R16		106T			
75	LT245/75R16	120/116S	120/116R	120/116Q		
75	P245/75R16		109T			
75	LT245/75R17	121/118S				
75	LT265/75R16	112/109S	123/120R	123/120Q		
75	P265/75R16		114T			
75	LT285/75R16	122/119S		122/119Q		
85	LT215/85R16	110/107S				
85	LT235/85R16	120/116S	120/116R	120/116Q		
75	P235/75R16		106T			
75	LT245/75R16	120/116S	120/116R	120/116Q		
75	P245/75R16		109T			
75	LT245/75R17	121/118S				
75	LT265/75R16	112/109S	123/120R	123/120Q		
75	P265/75R16		114T			
75	LT285/75R16	122/119S		122/119Q		
85	LT215/85R16	110/107S				
85	LT235/85R16	120/116S	120/116R	120/116Q		



While every care has been taken in the preparation of this tyre catalog, Runway shall not be held responsible for any inaccuracies therein.
All visual representations including photos, drawings, illustrations and renderings portray artist's impressions only and not to be relied upon as
statements or representation of facts. All information and specifications are current at the time of publication and are subject to change.